


HiLIGHT


Mobile Solar Light Tower

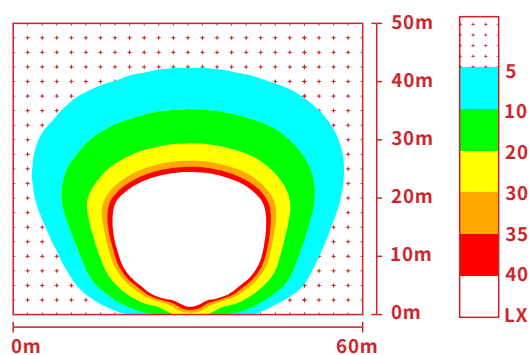

SPECIFICATION

BL4P-G9EHL800	
Solar Panel	4 × 460W
Panel Lifting	30°~45°, Electric Lifting
GEL Battery	8 × 200Ah DC12V
Battery Capacity	19200Wh 80% DoC
System Voltage	DC48V
Battery Charger	Yes
LED Lamp	4 × 200W, 120000Lms
Lighting Area (5 Lux)	2734m ²
Rotation	350° Electric
Tilt	90° Electric
Controller	40A MPPT
Mast & Height	5 Sections 9M
Mast Lifting	Electric Winch
Trailer Standard	US / AU / EU
Hitch	2" Ball / 3" Ring
Brake	Mechanical
Axle	Single
Tire	15 inch
Outriggers	4 ×
Lifting Ring	4 ×
Forklift Holes	2 ×
Working Temp	-35°C~60°C
Charging Time	8.8 hours
Running Time	19.2 hours
Dimension(mm)	3650*2250*2800
Weight	1600kgs
QTY in 20' / 40'	2 units / 5 units

OPTIONAL

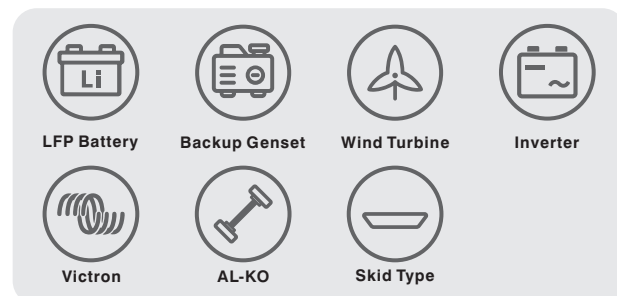

CONTAINER LOADING

20' | 2 units



40' | 5 units

